




# LAMIERE PER COPERTURE GRECATE Mod. EGB 401

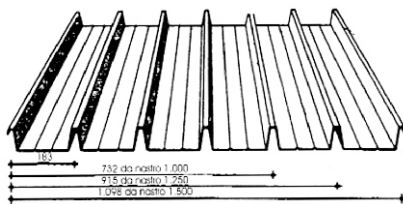

## CARATTERISTICHE STATICHE DELLA SEZIONE

SPESSORE	mm.	0,6	0,7	0,8	1,0	1,25
	Kg./m <sup>2</sup> .	6,42	7,49	8,57	10,72	13,40



Carico max utile uniformemente distribuito in Kg/m<sup>2</sup> Freccia 1/200L

Le quote si riferiscono ad un profilo di spessore medio

SPESSORE	L	DISTANZA FRA GLI APPOGGI IN METRI											
		1	1,25	1,5	1,75	2	2,25	2,5	2,75	3	3,25	3,5	3,75
0,6	520	330	230	170	125	90	65						
						100	80	60	50				
0,7	610	390	270	195	150	105	75	55					
						115	90	75	60				
0,8	700	445	305	225	170	120	85	60					
						130	105	85	70				
1,0	880	560	385	280	210	150	110	80	60				
						165	130	110	90	75	60		
1,25	1080	685	470	340	260	185	130	95	70	50			
						200	160	130	110	90	75		
0,6	650	415	285	210	160	125	100	80	60				
										65			
0,7	765	490	335	245	185	145	115	95	70	55			
										80	65		
0,8	875	560	385	280	215	165	135	110	80	65	50		
										90	75	65	55
1,0	1100	700	485	350	270	210	170	135	100	80	60		
										110	95	80	70
1,25	1355	860	590	430	330	255	200	170	125	95	70	60	
										140	115	100	85

